

FORM PTO-1390
(REV. 9-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

Mo6846/L.eA 33,663

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/009909

To be Assigned

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/EP0005166

06 June 2000 (6.06.00)

18 June 1999 (18.06.99)

TITLE OF INVENTION

Method of Decomposing Organic Compounds in Water

APPLICANT(S) FOR DO/EO/US SCHWEMLER, Christoph; HEUSER, Juergen; KAUTH, Hermann; KORDS, Christian; HORAK, Otto; GESTERMANN, Fritz

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:

1 page drawing containing Figure 1

Preliminary Amendment with Abstract page

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NUMBER	
To be Assigned 100009909		PCT/EP0005166		Mo6846/LeA 33,6	

21. <input type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO. \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4). \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4). \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 890.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	9 - 20 =		x \$18.00		
Independent claims	2 - 3 =		x \$84.00		
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	
TOTAL OF ABOVE CALCULATIONS =				\$ 890.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+	
SUBTOTAL =					
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).					
TOTAL NATIONAL FEE =				\$ 890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +					
TOTAL FEES ENCLOSED =				\$ 890.00	
				Amount to be refunded: \$	
				charged: \$	

a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.


b. ☒ Please charge my Deposit Account No. 13-3848 in the amount of \$ \$890.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 13-3848. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card
information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:


00157
 PATENT TRADEMARK OFFICE

SIGNATURE _____
Aron Preis
 NAME _____
29,426
 REGISTRATION NUMBER _____

JG13 Rec'd PCT/TC 12 DEC 2001

PATENT APPLICATION
Mo-6846
LeA 33,663

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION OF)
CHRISTOPH SCHWEMLER ET AL) PCT/EP00/05166
SERIAL NUMBER: TO BE ASSIGNED)
FILED: HEREWITH)
TITLE: METHOD OF DECOMPOSING)
ORGANIC COMPOUNDS IN)
WATER)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231
Sir:

Prior to its examination kindly amend the enclosed English language translation of the captioned application as follows:

"Express Mail" mailing label number	ET671474955US
Date of Deposit	December 12, 2001
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231- <i>Arlington VA 22204</i>	
Donna J. Veatch	
(Name of person mailing paper or fee)	
<i>Donna J. Veatch</i>	
Signature of person mailing paper or fee	

IN THE SPECIFICATION:

In page 1, change the title of the application to read:

-- METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER --.

Add page 18, containing the Abstract of the Disclosure reading as follows:

--METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER

ABSTRACT OF THE DISCLOSURE

A process for the decomposition of organic compounds in water, which has a TOC of more than 2 ppm and contains in addition dissolved carbonic acid or carbonates, is disclosed. The process entails treatment with ozone. Also disclosed is a process for the production of chlorine by electrolysis of common salt, characterized in that the common salt is added to the electrolysis process in the form of an aqueous solution obtained by treatment with ozone of water which has a TOC of more than 2 ppm and a common salt content of 2 to 20 wt.% and contains in addition dissolved carbonic acid or carbonates.--

IN THE CLAIMS:

Please amend Claims 5 and 7 as follows:

5. (Amended) Process according to Claim 1, wherein the water which is subjected to the treatment with ozone according to the invention is the waste water from the production of polycarbonate by the phase interface process.
7. (Amended) Process according to Claim 1, wherein the pH of the water supplied to the process for the treatment with ozone has a value which is less than 7 and is such that, after the treatment of the water with ozone, the pH value is more than 7.5.

Please add the following new claims:

- 8. A process according to Claim 3 wherein the water which is subjected to the treatment with ozone according to the invention is the waste water from the production of polycarbonate by the phase interface process.
9. A process according to Claim 3 wherein the pH of the water supplied to the process for the treatment with ozone has a value which is less than 7 and is such that, after the treatment of the water with ozone, the pH value is more than 7.5.--

REMARKS

The present amendment seeks to place the application in better conformance with U.S. practice. A page containing an Abstract of the Disclosure is enclosed. Entry of the amendment is requested.

Respectfully submitted,

By



Aron Preis
Attorney for Applicants
Reg. No. 29,426

Bayer Corporation
100 Bayer Road
Pittsburgh, Pennsylvania 15205-9741
(412) 777-8343
FACSIMILE PHONE NUMBER:
(412) 777-8363

s:/sr/ap0236

VERSION WITH MARKINGS TO SHOW CHANGES MADE:

IN THE SPECIFICATION:

In page 1, the title of the application has been changed to read:

-- METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER --.

Page 18 has been added to include an Abstract of the Disclosure, reading as follows:

--METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER

ABSTRACT OF THE DISCLOSURE

A process for the decomposition of organic compounds in water, which has a TOC of more than 2 ppm and contains in addition dissolved carbonic acid or carbonates, is disclosed. The process entails treatment with ozone. Also disclosed is a process for the production of chlorine by electrolysis of common salt, characterized in that the common salt is added to the electrolysis process in the form of an aqueous solution obtained by treatment with ozone of water which has a TOC of more than 2 ppm and a common salt content of 2 to 20 wt.% and contains in addition dissolved carbonic acid or carbonates.--

IN THE CLAIMS:

Claims 5 and 7 have been amended as follows:

5. Process according to [one of claims 1 to 4] Claim 1, wherein the water which is subjected to the treatment with ozone according to the invention is the waste water from the production of polycarbonate by the phase interface process.

7. Process according to [one of claims 1 to 6] Claim 1, wherein the pH of the water supplied to the process for the treatment with zone has a value which is less than 7 and is such that, after the treatment of the water with ozone, the pH value is more than 7.5.

The following new claims have been added:

- 8. A process according to Claim 3 wherein the water which is subjected to the treatment with ozone according to the invention is the waste water from the production of polycarbonate by the phase interface process.
9. A process according to Claim 3 wherein the pH of the water supplied to the process for the treatment with ozone has a value which is less than 7 and is such that, after the treatment of the water with ozone, the pH value is more than 7.5.--

Process for the decomposition of organic compounds in water

The present invention relates to a process for the decomposition of organic compounds in water which has a TOC of more than 2 ppm and contains in addition dissolved carbonic acid or carbonates, by treatment with ozone, and a process for the production of chlorine by electrolysis of common salt, characterised in that the common salt is added to the electrolysis process in the form of an aqueous solution obtained by treatment with ozone of water which has a TOC of more than 2 ppm and a common salt content of 2 to 20 wt.% and contains in addition dissolved carbonic acid or carbonates.

Processes for the decomposition of organic compounds in water by treating the water with ozone are known.

WO 9708101 describes the treatment of industrial waste water with ozone in the presence of a catalyst. EP-A 634465 describes the purification of industrial waste water with ozone in a two-step process, wherein aromatic compounds in particular are decomposed. EP-A 378994 describes the decomposition of aromatic impurities in industrial waste water by ozone at increased pressure and elevated temperature.

As described, for example, by E. Gilbert in Water Res., Volume 21 (10), pages 1273-1278, the use of ozone in industrially contaminated waste water generally serves to convert impurities consisting of compounds which are not, or only inadequately, bacterially degradable into components which are bacterially degradable. This means that even after the treatment with ozone, the water contains organic compounds which, in subsequent steps such as a biological waste-water treatment, then have to be decomposed into inorganic compounds such as, for example, carbon dioxide and water.

This is confirmed by Takahashi in Ozone Science and Engineering, Volume 12, 1990, pages 1 to 18. Takahashi reports that the treatment with ozone of water which contains

"Express Mail" mailing label number RT67147495505

Date of Deposit December 12, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents and Trademarks, Washington, DC 20590.

Donna J. Vatch
(Name of person mailing paper or fee)

[Signature]
(Signature of person mailing paper or fee)

11/11/01
(Mailing date)

A 33668

phenol results in the decomposition of the phenol, but that organic decomposition products such as, for example, oxalic acid, glyoxal and glyoxalic acid are formed which are not further decomposed by ozone.

- 5 If water contains organic compounds, this indicates a certain carbon content, which is present in the form of organic compounds. The carbon content which is present in the form of organic compounds is referred to as TOC (abbreviation of "Total Organic Carbon").
- 10 Water having a TOC of more than 2 ppm and containing in addition dissolved carbonic acid or carbonates is known, for example, in polycarbonate production.
- To produce polycarbonates by the so-called phase interface process, dihydroxydiaryl-
alkanes in the form of their water-soluble alkali metal salts are reacted with phosgene
15 in heterogeneous phase in the presence of inorganic bases such as, for example, sodium hydroxide solution and with an organic solvent in which the polycarbonate product is readily soluble. During the reaction, the aqueous phase is distributed in the organic phase. After the synthesis of polycarbonate by the phase interface process, the polycarbonate is separated in the form of its solution in the organic solvent used in the
20 synthesis, for example, methylene chloride. The remaining aqueous phase is advantageously freed from volatile organic impurities, such as remains of the organic solvent used in the synthesis, for example, methylene chloride; this can be effected by distillation, for instance. There then remains waste water having a high content of dissolved carbonates (for example, 0.3 to 1.5 wt.%) and a high content of dissolved
25 common salt (for example, 4 to 12 wt.%). Furthermore, the waste water is contaminated with organic compounds such as, for example, phenols (for example, unsubstituted phenol or alkylphenols or arylphenols or bisphenols such as, for example, bisphenol A) or amines (for example, triethylamine or ethylpiperidine). The carbonates are formed in the course of this, for example, by the hydrolysis of phosgene
30 as a secondary reaction in the polycarbonate production process.

The common salt dissolved in the waste water from polycarbonate production by the phase interface process is a valuable raw material. A possible way of utilising the common salt in the waste water from polycarbonate production by the phase interface process has not as yet been described.

5

A conceivable way of utilising the load of common salt in the waste water from polycarbonate production by the phase interface process is to use the common salt for the production of chlorine and sodium hydroxide solution by electrolysis. However, this possible method has hitherto failed because of the other constituents, in particular the organic constituents, of the waste water from polycarbonate production by the phase interface process. In particular, the especially advantageous membrane process for chlor-alkali electrolysis requires pure aqueous solutions of common salt as starting material.

10

If the common salt is added to the electrolysis process in the form of an aqueous solution, this aqueous solution has to contain a low concentration of organic impurities; the TOC of the common salt solution must preferably be less than 1 ppm. Even when the TOC of the common salt solution is less than 1 ppm, the common salt solution may still to a small extent contain organic impurities which interfere with the electrolysis process, for example, by decreasing the useful lives of important components of the plant such as, for example, the membranes in the case of the membrane process. All this applies in particular to the membrane process for the electrolysis of common salt, where the useful life of the membranes is an important factor which determines the economic efficiency.

20

25

Of course, other waste waters, which do not arise from polycarbonate production and are characterised in that they contain dissolved carbonates or carbonic acid, are also known.

30

It is now known that carbonates or carbonic acid dissolved in the water hinder the removal of the organic compounds from the water by treatment with ozone because

carbonate acts as a free-radical scavenger and thereby hinders the decomposition of organic compounds via radical intermediate steps. This is reported by Hoigne and Bader in Wat. Res., Volume 10, 1976, page 377 ff. and by Gurol and Watistas in Wat. Res., Volume 21, 1987, pages 895 to 900.

5

For water which contains organic compounds and in addition dissolved carbonates or carbonic acid, there consequently arises the situation that the treatment with ozone in the alkaline pH range is hindered by the carbonate ions. In the acidic pH range, however, the treatment with ozone, according to the reports from prior art, results not in the complete decomposition of the organic compounds, but in the formation and persistence of compounds such as, for example, oxalic acid. In both cases, therefore, a complete decomposition of the organic compounds and hence of the TOC to inorganic decomposition products such as, for example, carbon dioxide and water, by treatment with ozone is impossible according to prior art.

10
15

Accordingly, the object of the present invention is to provide a process for decreasing the content of organic compounds in water which contains dissolved carbonic acid or carbonates.

20

If the water contains dissolved common salt, the object of the present invention is also to provide a process for decreasing the content of organic compounds in the water containing the dissolved carbonic acid or carbonates to such a small amount that the common salt dissolved in the water can be used for the production of chlorine by electrolytic processes.

25

The object according to the invention is achieved by a process for the treatment, with ozone, of water which has a TOC of more than 2 ppm and contains at least 0.01 wt.% of dissolved carbonic acid or carbonates, characterised in that the treatment is carried out at a temperature of 10°C to 130°C and at an absolute pressure of 0.5 to 3 bar and that the water which is supplied to the process has a pH value of 2 to 11 and that the treatment takes place over a period of from 1 minute up to 10 hours.

30

It has also been found that the water treated according to the invention, if it contains dissolved common salt, can be used for the production of chlorine and sodium hydroxide solution by electrolysis of the common salt. In particular, the chlorine can be produced by the well-known membrane process. Here the process is not interfered with by impurities which may possibly still be present in very low concentration; in particular, the useful life of the membranes is not decreased in comparison with the use of common salt solutions which have been obtained by dissolving common salt in completely pure water.

10

The process according to the invention for the treatment of water with ozone is particularly economic, is not expensive technologically and is non-polluting. A high excess pressure is not required. No catalyst is required. No UV irradiation is required. No additional chemicals such as, for example, hydrogen peroxide are required. Of course these measures can however, additionally be carried out.

15

The process according to the invention allows the TOC in the water to be decreased to below 1 ppm.

20

The water treated with ozone according to the invention is moreover so pure that it can be introduced directly into surface water without the necessity of a further purification. An economic and environmentally favourable possible method of working up and disposing of water which has a TOC of more than 2 ppm and in addition dissolved carbonic acid or carbonates is thereby provided.

25

According to the invention, the TOC of the water prior to the treatment with ozone is more than 2 ppm, preferably more than 5 ppm, particularly preferably more than 10 ppm.

30

In the invention, the TOC is determined in accordance with DIN 38 409 - H 3, using a TOC 500 apparatus from Shimadzu, from a measurement of the content of inorganic

carbon (TIC) and of the content of inorganic or organic carbon (TC) in the water sample. A constant flow of highly pure air, free from carbon dioxide, is used as carrier gas. For the TC measurement, a given quantity of the sample to be analysed is injected into the TC combustion tubes and is burnt there at 680°C on a TC catalyst. The carbon dioxide formed, after cooling and drying, is detected in an infrared analyser. For the TIC measurement, the sample is acidified with phosphoric acid and the carbon dioxide formed is expelled from the sample and detected as above. The TOC is then calculated from the measured TIC and TC values as follows:

$$\text{TOC} = \text{TC} - \text{TIC}.$$

According to the invention, the content of carbonic acid or carbonates in the water is at least 0.1 wt.%, calculated as carbonate (CO_3^{2-}). It is preferably at least 0.3 wt.%, particularly preferably at least 1.0 wt.%.

The treatment with ozone according to the invention takes place at a temperature of 10°C to 130°C, preferably at 20°C to 100°C, particularly preferably at 60°C to 90°C.

The treatment with ozone according to the invention takes place at an absolute pressure of 0.5 to 3 bar, preferably at 1 to 2 bar, particularly preferably at 1.2 to 1.8 bar.

The water supplied to the process according to the invention for the treatment with ozone has a pH value of 2 to 11; preferably it has a pH value of 3 to 11, particularly preferably it has a pH value of 5 to 9 and most particularly preferably it has a pH value of 5.5 to 7. The pH value is measured at 20°C.

A particularly preferred embodiment of the invention is provided by ensuring that the pH of the water supplied to the process for the treatment with ozone has a value which is less than 7 and is such that, after the treatment of the water with ozone, the pH value is more than 7.5. This shift in the pH value from the acidic to the basic range in the course of the treatment with ozone results in a particularly effective decomposition of

the TOC in the water. To achieve this shift in the pH value from the acidic to the basic range, the pH value of the water supplied to the process for the treatment with ozone has to be adjusted according to the carbonate content of the water and the possible content of other substances which give rise to a change in the pH value in the course of the treatment of the water with ozone.

The treatment with ozone according to the invention is carried out over a period of from 1 minute up to 10 hours, preferably from 6 minutes to 2 hours, particularly preferably from 10 minutes to 60 minutes.

If the water which is subjected to the treatment with ozone according to the invention contains dissolved common salt, a preferred embodiment of the present invention is a process whereby, after the ozone treatment of the water, the latter is then passed to the electrolysis step for the production of chlorine. Here the electrolysis is preferably carried out by the membrane process. The water which is subjected to the treatment with ozone according to the invention contains, for example, 2 to 20 wt.% common salt. It preferably contains 4 to 12 wt.% common salt.

The production of chlorine by electrolysis of common salt is described, for example, in Ullmann's Encyclopedia of Industrial Chemistry, Volume A 6, 5th Edition, 1986, pages 401 to 477. In particular, the especially advantageous membrane process is also described here on pages 437 to 450.

A precondition for the utilisation of the common salt in the waste water from polycarbonate production by electrolysis is the decomposition of the organic matter contained in the waste water to values below approximately 1 ppm. This applies in particular when the especially advantageous membrane process is to be used for the chlor-alkali electrolysis.

The water which is subjected to the treatment with ozone according to the invention is preferably the waste water from the production of polycarbonate by the phase interface

process, and particularly preferably waste water from the production of bisphenol A polycarbonate by the phase interface process.

5 The temperature of the water supplied to the ozone treatment process can be adjusted to the required value, for example, by means of a heat exchanger.

10 The pH value of the water supplied to the ozone treatment process can be adjusted to the required value, for example, by adding an acid such as, for example, hydrochloric acid, or a lye such as, for example, sodium hydroxide solution.

15 To achieve an optimal reaction, the water and the ozone produced in the ozone generator should be mixed together as intensively as possible. For this, in principle any form of gas distribution is possible, for example, the use of ultrasound, glass frits or conventional injectors.

20 The oxidation of the waste water with ozone is preferably carried out in a continuously operated process, with preferably several reaction columns being connected one behind the other. To achieve as quantitative a decomposition of the TOC as possible, preferably a substream of the freshly produced ozone is passed directly to the columns following the first column.

25 A preferred embodiment of the invention is provided by using at least two reaction columns, in particular three reaction columns, for the treatment with ozone and in the course of this varying the ozone distribution between a distribution of 1:1 or 1:1:1 (volumetric flow rate of first column: volumetric flow rate of second column) in each column up to 5:1 or 5:1:1. The ozone distribution in the reaction columns is preferably 80% in the first column(s) and 20% in the last column.

30 Peak loadings of the TOC possibly occurring in the water can be adsorbed, for example, by an adsorption column connected upstream of the plant for the treatment with ozone and under normal operating conditions can be passed in a well-regulated

manner to the ozone treatment process. The adsorption column is preferably only operated in cases where loading peaks occur.

5 The adsorption column is preferably constructed as follows. The jacket of the adsorption column is cooled by water. An operating temperature of 15°C is thereby established. The adsorption column is filled with adsorbents that adsorb phenol and bisphenol well and, depending on the pH, also desorb phenol and bisphenol again, such as, by way of example and preferably, a microporous, non-functionalised, hydrophilic, hypercrosslinked copolymer based on styrene and divinylbenzene, or
10 active charcoal as adsorbent.

The process according to the invention renders possible, for example, the treatment of the waste water from the production of polycarbonate by the phase interface process. The purified waste water can then be used for the exploitation of the common salt
15 contained in it for the production of chlorine by electrolysis. Here it is advantageous to increase the concentration of the salt in the water which can, for example, amount to 4 to 12 wt.%, by addition of solid common salt to a concentration of 20 to 30 wt.%, preferably 25 wt.%, before the water is passed to the electrolysis. The chlorine produced during the electrolysis and the sodium hydroxide solution can again be
20 passed to the process for the production of polycarbonate by the phase interface process, after the chlorine has been reacted with carbon monoxide to form phosgene and the sodium hydroxide solution has been used, for example, for the preparation of bisphenolate solutions.

25 The organic compounds which constitute the TOC contamination of the water may be any organic compounds. These can include both aliphatic and aromatic compounds. The compounds may contain all kinds of hetero atoms. In the case of the treatment of waste water from polycarbonate production, the organic compounds consist substantially of phenols (for example, unsubstituted phenol or alkylphenols or
30 arylphenols or bisphenols such as, for example, bisphenol A) and amines (for example, triethylamine, ethylpiperidine).

The ozone used in the process according to the invention is produced, for example, from air or from oxygen by known processes. In the course of this, mixtures of ozone in air or in oxygen are formed which contain, for example, 40 to 150 g ozone per cubic
5 metre of gas and which can be used as such. Higher concentrations of ozone can be produced by special concentration processes (adsorption processes or desorption processes).

Unused ozone which is present, for example, in the waste gas from the plant for the
10 treatment of water with ozone, can be thermally or catalytically decomposed in a residual-ozone annihilator.

Other preferred embodiments of the present invention are provided by carrying out in addition a treatment with hydrogen peroxide prior to, during or after the treatment with
15 ozone. The treatment with hydrogen peroxide is preferably carried out at the same time as the treatment with ozone.

Other preferred embodiments of the present invention are provided by carrying out in addition a treatment with UV radiation prior to, during or after the treatment with
20 ozone. The treatment with UV radiation is preferably carried out at the same time as the treatment with ozone.

Other preferred embodiments of the present invention are provided by carrying out in addition a treatment with hydrogen peroxide and with UV radiation prior to, during or
25 after the treatment with ozone. The treatment with hydrogen peroxide and with UV radiation is preferably carried out at the same time as the treatment with ozone.

The invention is explained in the following with the aid of a drawing (Fig. 1) representing a preferred embodiment.

The water is brought to the required temperature by means of the heat exchanger 1. The water is passed through the adsorption column 2 only if the TOC content is unusually high. Appropriate valves are provided for this. Where the TOC content is low, the water can likewise be passed through the adsorber in order to desorb the TOC again. The appropriately heated water is mixed with hydrochloric acid 4 in the agitated tank 3 in order to adjust the pH value. The treatment with ozone then takes place in the columns 5 and 6. Because of the high potential corrosiveness of the ozone-oxygen mixture in water, both columns are preferably made of titanium. The water is delivered via the pump 7. The columns can be heated and are connected with one another by an overflow. The heat exchangers 8 and 9 serve to recondense water which may have been carried over (stripped) by the flow of gas. The ozone is produced from oxygen in the ozone generator 10 and added to the waste water via a nozzle 11 and 12 at the inlet to each of the columns. Unused ozone is thermally annihilated in the residual-ozone annihilator 13, preferably at a temperature of 250°C to 300°C.

For the analysis of the experiments, three sampling points 14 (blank test), 15 (downstream of the first column) and 16 (downstream of the second column) were installed for the withdrawal of the treated waste water. The ozone concentration is determined at the measuring points 17, 18, 19 and 20, downstream of the ozone generator and downstream of the heat exchangers 8 and 9.

The invention is illustrated in the following by Examples.

In the pilot plant reproduced in Fig.1, the waste water from the production of bisphenol A homopolycarbonate by the phase interface process was treated with different quantities of ozone at different temperatures and different pH values. The precise experimental conditions and results are shown in Table 1 (Examples according to the invention) and Table 2 (Comparison Examples).

The water supplied to the process contained 4 to 12 wt.% common salt and 0.3 to 1.5 wt.% carbonate. The TOC values of the water are given in the Tables. The TOC arose substantially from phenol and bisphenol A.

- 5 The experiments prove that, in order to decrease the TOC to values of approximately 1 ppm, it is particularly advantageous to establish an initial pH value of less than 7 and a temperature of between 60°C and 90°C. In the course of the reaction, a pH value of above 7 is established in column 1 and a pH value of about 8 is obtained after column
- 10 2. This change in the pH value is due to the fact that the CO₂ contained in the waste water can escape only to some extent during the neutralisation and escapes only in the first column, so that an associated rise in the pH value takes place. This is accompanied by a change in the reaction mechanism from oxidation through attack by ozone to oxidation through attack by hydroxyl groups. The attack by ozone leads to the decomposition of the phenols and the formation of decomposition products, which are
- 15 then decomposed by the hydroxyl groups.

Table 1 (Examples according to the invention)

Waste water	Feed of ozone-containing gas to column 1	Feed of ozone-containing gas to column 2	Ozone-concentration in ozone-containing gas	TOC at 14	TOC at 15	TOC at 16	pH at 14	pH at 15	pH at 16	Temperature in column 1 / temperature in column 2
l/h	l/h	l/h	g/m ³	mg/l	mg/l	mg/l				°C
100	350	100	102	7.5	2.5	1.7	7.2	8.2	8.5	80/76
100	350	100	100	5	2.3	1.3	7.1	8.2	8.5	80/75
100	280	100	110	4.9	1.8	0.8	6.9	8.1	8.5	81/77
100	350	90	103	6.6	3.2	1.2	7	7.8	8.4	82/77
100	350	90	102	8.5	1.8	1.1	7	8.3	8.5	81/77
100	350	100	99.4	6.6	1.7	0.7	6.7	7.8	8.4	84/79
100	350	100	96	9.7	2	0.7	6.8	7.7	8.3	83/79
100	500	100	103	13.5	4.3	1.4	6.4	7.7	8.2	93/80
100	310	70	111	7.1	1.2	0.6	6.7	7.8	8.3	82/79
100	350	90	103	8.3	1.7	0.6	6.6	7.9	8.3	82/80
100	350	100	101	7	3.4	2.4	6.1	6.8	5.7	73/71
100	350	100	100	5.5	0.9	<0.5	6.3	6.9	6	74/71
100	350	100	101	8.2	1.9	0.6	6.4	6.9	6.1	74/70
100	350	100	102	5.4	1.2	0.9	4.6	6	6.3	95/76
100	350	100	99.4	4	1.4	0.6	6	6.4	6.4	55/59

Table 1 (Continuation)

Waste water	Feed of ozone-containing gas to column 1	Feed of ozone-containing gas to column 2	Ozone-concentration in ozone-containing gas	TOC at 14	TOC at 15	TOC at 16	pH at 14	pH at 15	pH at 16	Temperature in column 1 / temperature in column 2
l/h	l/h	l/h	g/m ³	mg/l	mg/l	mg/l				°C
100	350	100	101	5.7	1.1	<0.5	6	7.2	8.1	80/82
100	350	100	101	2.1	1	<0.5	6.1	6.9	7.9	70/76
100	350	100	105	11.3	5.2	1.2	6.3	6.9	7.8	71/74
100	350	100	99.6	5.4	2.2	1.4	6.3	7	7.9	73/76
100	350	100	100	9.8	1.6	0.9	6.3	6.7	6.8	73/77
100	350	100	102	3.1	2.5	0.5	5.6	6	6.4	73/65
100	350	100	99.4	11.3	1.8	0.7	6.1	6.5	7	91/91
100	350	100	127	10.7	1.5	<0.5	6.3	7.3	7.4	90/91
100	350	100	111	11.1	1.9	0.7	6.1	7	8.4	91/93
100	350	100	100	6.6	1.4	0.9	6.4	7.8	8.5	91/93
100	350	100	108	9.1	1.2	<0.5	6.4	7.8	8.5	90/91
100	350	100	102	10.6	1.5	<0.5	6.4	7.4	8.5	90/92

Table 2

(Comparison Examples; pH value of the water prior to ozone treatment: 12, temperature of the water prior to ozone treatment: 60°C)

Waste water	Feed of ozone-containing gas to column 1	Feed of ozone-containing gas to column 2	Ozone-concentration in ozone-containing gas	TOC at 14	TOC at 15	TOC at 16
l/h	l/h	l/h	g/m ³	mg/l	mg/l	mg/l
400	400	100	100	12.4	9.3	8.7
500	600	100	100	11.5	10	8.7
500	350	100	140	21.5	17.8	11.1
500	350	100	100	9.5	8.7	6.4
700	500	100	100	25.6	22.7	23.5
700	700	100	100	27.9	19.9	18.1

Claims

1. Process for the treatment, with ozone, of water which has a TOC of more than 2 ppm and contains at least 0.1 wt.% of dissolved carbonic acid or carbonates, characterised in that the treatment is carried out at a temperature of 10°C to 130°C and at an absolute pressure of 0.5 to 3 bar and that the pH value of the water which is supplied to the process is 2 to 11 and that the treatment takes place over a period of from 1 minute up to 10 hours.
2. Process according to claim 1, wherein the water contains 2 to 20 wt.% common salt.
3. Process for the production of chlorine by electrolysis of common salt, characterised in that the common salt is supplied to the electrolysis process in the form of an aqueous solution, which is obtained by the treatment, with ozone, of water which has a TOC of more than 2 ppm and a common salt content of 2 to 20 wt.% and contains at least 0.1 wt.% of dissolved carbonic acid or carbonates, wherein the treatment is carried out at a temperature of 10°C to 130°C and at an absolute pressure of 0.5 to 3 bar and wherein the pH value of the water which is supplied to the process for the treatment with ozone is 2 to 11 and wherein the treatment with ozone takes place over a period of from 1 minute up to 10 hours.
4. Process according to claim 3, wherein the electrolysis is carried out by the membrane process.
5. Process according to one of claims 1 to 4, wherein the water which is subjected to the treatment with ozone according to the invention is the waste water from the production of polycarbonate by the phase interface process.

WO 00/78682

PCT/EP00/05166


-18-

METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER

ABSTRACT OF THE DISCLOSURE

A process for the decomposition of organic compounds in water, which has a TOC of more than 2 ppm and contains in addition dissolved carbonic acid or carbonates, is disclosed. The process entails treatment with ozone. Also disclosed is a process for the production of chlorine by electrolysis of common salt, characterized in that the common salt is added to the electrolysis process in the form of an aqueous solution obtained by treatment with ozone of water which has a TOC of more than 2 ppm and a common salt content of 2 to 20 wt.% and contains in addition dissolved carbonic acid or carbonates.

Fig.1

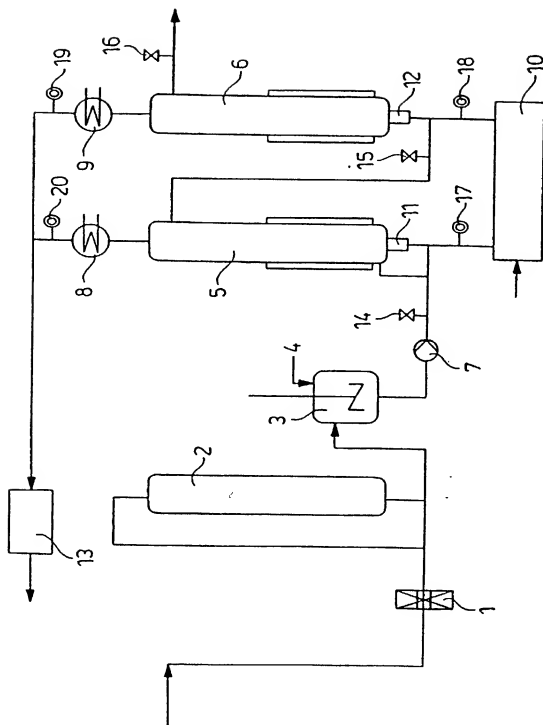

10000000 1120012

COMBINED DECLARATION AND POWER OF ATTORNEY

ATTORNEY DOCKET NO

FEB 20 2002

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD OF DECOMPOSING ORGANIC COMPOUNDS IN WATER

the specification of which is attached hereto,

or was filed on June 6, 2000

as a PCT Application Serial No. PCT/EP00/05166

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s), the priority(ies) of which is/are to be claimed:

199 27 910.1
(Number)

Germany
(Country)

June 18, 1999
(Month/Day/Year Filed)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose the material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Le A 33 663-US

COPY OF PAPERS
ORIGINALLY FILED

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and this application and to transact all business in the Patent and Trademark Office concerning

JOSEPH C. GIL, Patent Office Registration Number 26,602 ARON PREIS, Patent Office Registration Number 29,426
LYNDANNE M. WHALEN, Patent Office Registration Number 29,457 THOMAS W. ROY,
Patent Office Registration Number 29,582 RICHARD E. L. HENDERSON, Patent Office Registration Number 31,619
GODFRIED R. AKORLI, Patent Office Registration Number 28,779 N. DENISE BROWN, Patent Office
Registration Number 36,097 NOLAND J. CHEUNG, Patent Office Registration Number 39,138
DIDERICO VAN EYL, Patent Office Registration Number 38,641 CAROLYN M. SLOANE, Patent Office
Registration Number 44,339 JAMES R. FRANKS, Patent Office Registration Number 42,552
JACKIE ANN ZURCHER, Patent Office Registration Number 42,251
RAYMOND J. HARMUTH, Patent Office Registration Number 33,896

all of Bayer Corporation, Pittsburgh, Pennsylvania 15205-9741

Send Correspondence To: Direct Telephone Calls To:
Patent Department
Bayer Corporation (412) 777-2349
100 Bayer Road
Pittsburgh, Pennsylvania 15205-9741

1-00 FULL NAME OF SOLE OR FIRST INVENTOR <u>Christopher Schwemler</u>		INVENTOR'S SIGNATURE <i>Chris Schwemler</i>	DATE 2001-12-02
RESIDENCE <u>League City, TX 77573, USA</u> TX		CITIZENSHIP German	
POST OFFICE ADDRESS 2220 Crossbrook Court, League City, TX 77573, USA			
2-00 FULL NAME OF SECOND INVENTOR <u>Jürgen Heuser</u>		INVENTOR'S SIGNATURE <i>Jürgen Heuser</i>	DATE 01-10-02
RESIDENCE <u>D 47803 Krefeld, Germany</u> DEX		CITIZENSHIP German	
POST OFFICE ADDRESS c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany			
3-00 FULL NAME OF THIRD INVENTOR <u>Hermann Kauth</u>		INVENTOR'S SIGNATURE <i>Hermann Kauth</i>	DATE 01-10-01
RESIDENCE <u>D 47803 Krefeld, Germany</u> DEX		CITIZENSHIP German	
POST OFFICE ADDRESS c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany			
4-00 FULL NAME OF FOURTH INVENTOR <u>Christian Kords</u>		INVENTOR'S SIGNATURE <i>Christian Kords</i>	DATE 01-10-01
RESIDENCE <u>D 47829 Krefeld, Germany</u> DEX		CITIZENSHIP German	
POST OFFICE ADDRESS c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany			
5-00 FULL NAME OF FIFTH INVENTOR <u>Otto Horak</u>		INVENTOR'S SIGNATURE <i>Otto Horak</i>	DATE 02-10-01
RESIDENCE <u>D 51375 Leverkusen, Germany</u> DEX		CITIZENSHIP German	
POST OFFICE ADDRESS c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany			
6-00 FULL NAME OF SIXTH INVENTOR <u>Fritz Gestermann</u>		INVENTOR'S SIGNATURE <i>Fritz Gestermann</i>	DATE 01-10-12
RESIDENCE <u>D 51377 Leverkusen, Germany</u> DEX		CITIZENSHIP German	
POST OFFICE ADDRESS c/o BAYER AKTIENGESELLSCHAFT, D 51368 Leverkusen, Germany			
FULL NAME OF SEVENTH INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENCE		CITIZENSHIP	
POST OFFICE ADDRESS			